


Mobile radiation shield

310/B-3 (Height adjustable)

Height adjustable x-ray shield

Superior design & construction make this mobile shield ideal for use in confined areas close to the table side

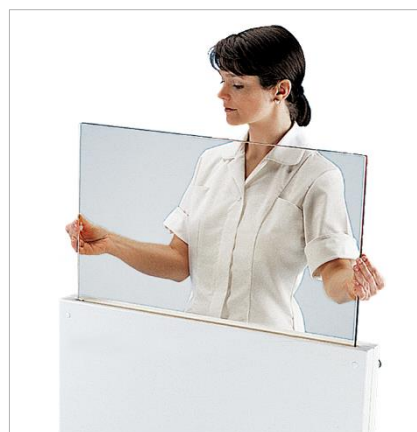

Features

- > This shield is compact and easily manoeuvred into position.
- > It occupies minimal space when lowered after use.
- > The 70 cm wide clear lead acrylic window provides an uninterrupted view of procedures. It is counterbalance, so has no apparent weight, and can be raised to a height of up to 188 cm, for complete protection, or lowered in seconds to 115 cm for access to the patient.
- > Equipment hand controls, attached to the optional accessory rail, allow personnel to operate within a safe zone created by the shield. The full width rails are factory fitted and available in two sizes: 769 x 8 x 25 mm & 769 x 10 x 25 mm.

Weights dimensions and ordering information

Height adjustable x-ray shield. Model: 310/B-3

Optional factory fitted accessory rail

(used for attaching equipment controls)

Accessory rail 780 x 10 x 25 mm. Model: 310/3.1

Accessory rail 780 x 8 x 25 mm. Model: 310/9.1

Lead equivalence

Upper transparent window: 0.5mm Pb (0.59 mm Pb @ 150 kV)

Lower section: 1.0mm Pb (0.92 @ 100 kV & 0.56 mm Pb @ 150 kV)

Shipping details

1 x heavy duty cardboard carton.

Net weight: 61 kg

Gross weight: 65 kg

Packed size: 132 x 87 x 14 cm

Optional fitted flexible protective side panel. Model 317/05-01

Comprises an 85cm high flexible curtain on a double-jointed pivotal arm.

Can be factory fitted to either side, or to both sides of model 310/B-3.

One curtain, when fully extended increases the shield width by 68cm.

Pivotal arm can form a curved side wing or fold in front when not in use.

Lead equivalence

Lead vinyl curtain: 0.5mm Pb (0.52 mm Pb @ 150 kV)

Net weight: 5.8 kg

Specification & descriptions are approximate.

